




ROSHNI KI EK NAYI PEHCHAN



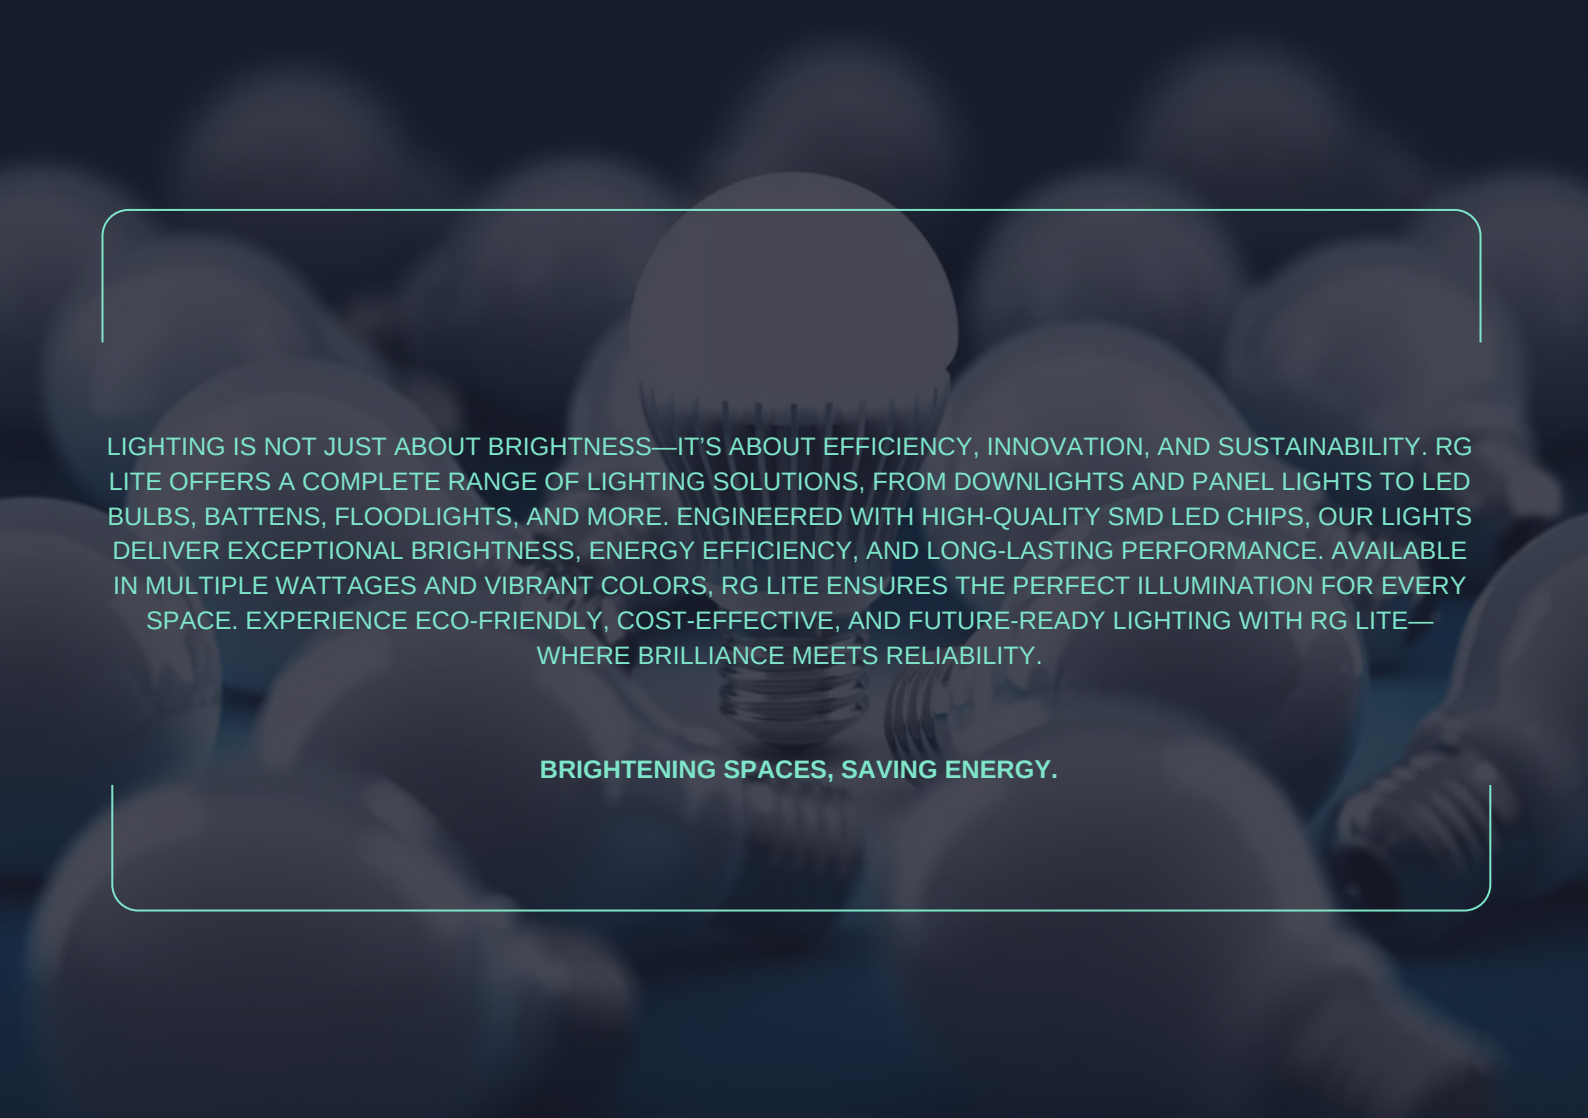

LIGHTING IS NOT JUST ABOUT BRIGHTNESS—IT'S ABOUT EFFICIENCY, INNOVATION, AND SUSTAINABILITY. RG LITE OFFERS A COMPLETE RANGE OF LIGHTING SOLUTIONS, FROM DOWNLIGHTS AND PANEL LIGHTS TO LED BULBS, BATTENS, FLOODLIGHTS, AND MORE. ENGINEERED WITH HIGH-QUALITY SMD LED CHIPS, OUR LIGHTS DELIVER EXCEPTIONAL BRIGHTNESS, ENERGY EFFICIENCY, AND LONG-LASTING PERFORMANCE. AVAILABLE IN MULTIPLE WATTAGES AND VIBRANT COLORS, RG LITE ENSURES THE PERFECT ILLUMINATION FOR EVERY SPACE. EXPERIENCE ECO-FRIENDLY, COST-EFFECTIVE, AND FUTURE-READY LIGHTING WITH RG LITE—WHERE BRILLIANCE MEETS RELIABILITY.

BRIGHTENING SPACES, SAVING ENERGY.

DOWNLIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	5 W	6W	9W
MODEL NAME	RG STAR 5W	RG WAVE	RG WAVE
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	550 LM	600 LM	900 LM
WIDE-VOLTAGE RANGE	100-300 Vac	200-240 Vac	150-300 Vac
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

5W : Red, Blue, Green, Pink, White, Warm White, Neutral White

6W : Red, Blue, Green, Pink, White, Warm White, Neutral White

9W : Red, Blue, Green, Pink, White, Warm White, Neutral White

FEATURES:



UPTO 80%
ENERGY SAVING



NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START



DOWNLIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	
MODEL NAME	RG WAVE
POWER FACTOR	0.9, TA-50°C
LUMEN	100L/W
WIDE-VOLTAGE RANGE	150-300 Vac
INPUT-VOLTAGE RANGE	220-230 Vac



COLORS AVAILABLE:

6 + 3W: White + Warm White
White + Blue
White + Red

FEATURES:



UPTO 80%
ENERGY SAVING



NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START



DEEPLIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	3W	3W 3 IN 1 (RBP)
MODEL NAME	RG DEEP 3W	RG DEEP 3W
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C
LUMEN	360 LM	360 LM
WIDE-VOLTAGE RANGE	150-300 Vac	150-300 Vac
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

3W: Red, Blue, Green, Pink, White, Warm White, Neutral White

3W (3 IN 1 (RBP): Wh WW NW

FEATURES:



UPTO 80%
ENERGY SAVING



NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START



DUAL TONE PANEL LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	6W	15W	20W
MODEL NAME	RG PANEL 6W	RG PANEL 15W	RG PANEL 20W
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	600 LM	1500 LM	2000 LM
WIDE-VOLTAGE RANGE	90-380 Vac	90-380 Vac	90-380 Vac
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

6W : White + Warm White , White + Blue, White + Red

15W : White + Warm White , White + Blue, White + Red

20W : White + Warm White , White + Blue, White + Red

FEATURES:



UPTO 80%
ENERGY SAVING




NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START

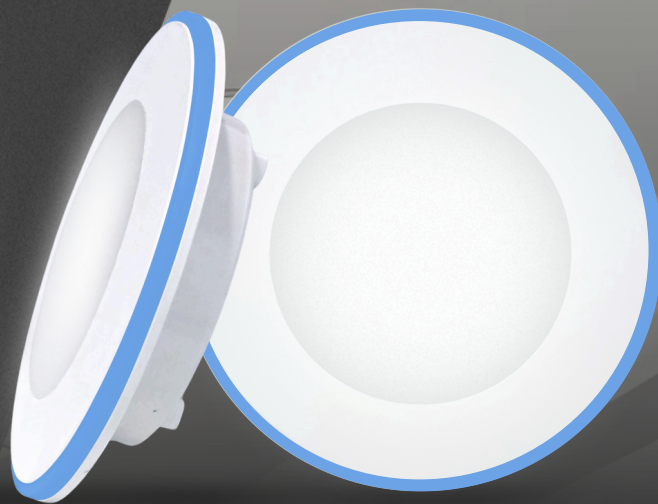

SQUARE | ROUND PANEL LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	9W	12W	16W	22W
MODEL NAME	RG PANEL 9W	RG PANEL 12W	RG PANEL 16W	RG PANEL 22W
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	900 LM	1200 LM	1600 LM	2200 LM
WIDE-VOLTAGE RANGE	90-380 Vac	90-380 Vac	90-380 Vac	90-380 Vac
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

9W : White, Warm White, Neutral White

12W : White, Warm White, Neutral White

16W : White, Warm White, Neutral White

22W : White, Warm White, Neutral White

CUT SIZES (INCHES)

9W	12W	16W	22W
4" x 4"	5" x 5"	6" x 6"	8" x 8"

FEATURES:



UPTO 80%
ENERGY SAVING



NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START



LED BULBS

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	7W	9W	12W	15W	20W
MODEL NAME	RG LED 7W	RG LED 9W	RG LED 12W	RG LED 15W	RG LED 20W
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	(LM)±5% 945	(LM)±5% 1215	(LM)±5% 1560	(LM)±5% 1950	(LM)±5% 2600
WIDE-VOLTAGE RANGE	140 - 380V	140 - 380V	140 - 380V	140 - 380V	140 - 380V
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

7W : White

9W : White

12W : White

15W : White

20W : White

FEATURES:



UPTO 80%
ENERGY SAVING



BRIGHTEST
IN CLASS



ECO
FRIENDLY



INSTANT
START



LED INVERTER BULB

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	9W
MODEL NAME	RG INVTR LED
POWER FACTOR	0.9, TA-50°C
LUMEN	(LM)±5% 1170
WIDE-VOLTAGE RANGE	140 - 380V
INPUT-VOLTAGE RANGE	220-230 Vac



COLORS AVAILABLE:

9W: White

FEATURES:



LONGER BATTERY
BACKUP



FAST
CHARGING



ENERGY
EFFICIENT



HIGH
BRIGHTNESS



CHANDRAYAAN LED BULB

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	30W	40W	50W
MODEL NAME	RG LED CY 30W	RG LED CY 40W	RG LED CY 50W
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	(LM)±5% 3300	(LM)±5% 4400	(LM)±5% 5500
WIDE-VOLTAGE RANGE	140 - 380V	140 - 380V	140 - 380V
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

30W : White

40W : White

50W : White

FEATURES:



BRIGHTEST IN
CLASS



NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START



LED NIGHT QUEEN

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	0.5W
MODEL NAME	LED NQ 0.5W
POWER FACTOR	0.9, TA-50°C
BAYONET CAP	B22
WIDE-VOLTAGE RANGE	140 - 380V
INPUT-VOLTAGE RANGE	220-230 Vac



COLORS AVAILABLE:

0.5W: Red, Blue, Pink, Green, White, Yellow, Orange

FEATURES:



LOW HEAT



SAVE UP TO 85%
ENERGY



ECO
FRIENDLY



LONGER LIFE



T5 BATTEN LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	20W
MODEL NAME	RG T5 BTN 20W
POWER FACTOR	0.9, TA-50°C
LUMEN	2200 LM
BODY TYPE	PC Body
INPUT-VOLTAGE RANGE	220-230 Vac



COLORS AVAILABLE:

20W: Red, Blue, Green, Pink, White, WW, NW

FEATURES:



BRIGHTEST IN
CLASS



LONGER
LIFE




ECO
FRIENDLY



INSTANT
START



HPF
DRIVER BASED

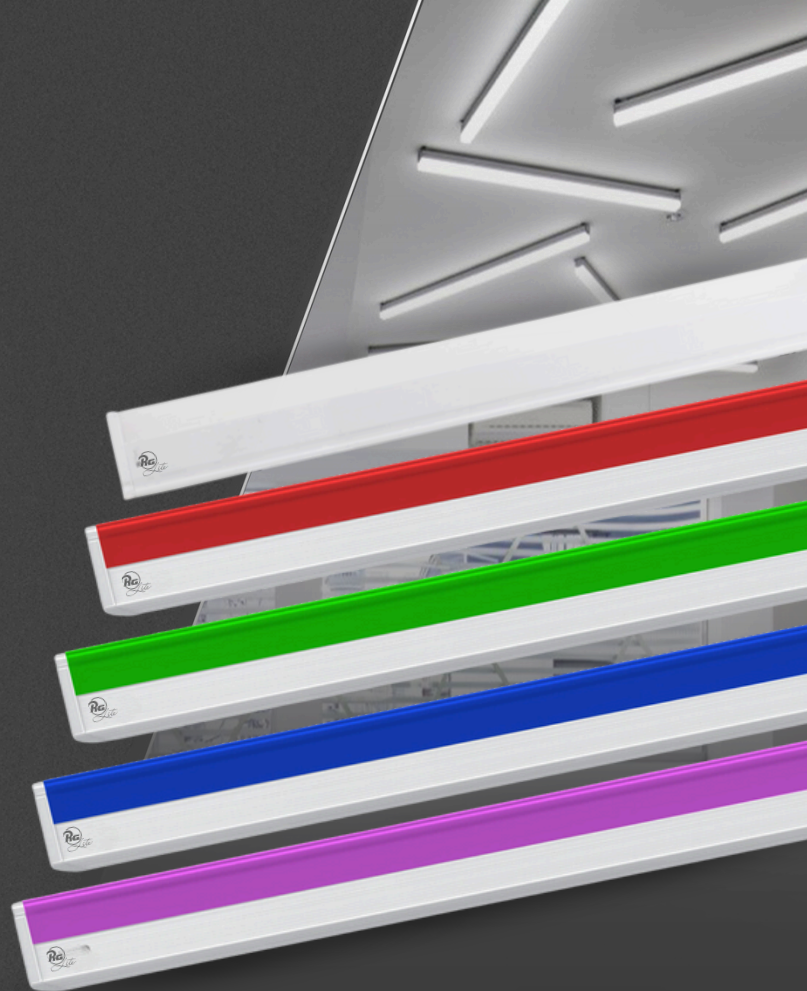

T8 BATTEN LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	36W
MODEL NAME	RG T8 BTN 36W
POWER FACTOR	0.9, TA-50°C
LUMEN	5000 LM
BODY TYPE	AL Body
INPUT-VOLTAGE RANGE	220-230 Vac



COLORS AVAILABLE:

36W: White, WW

FEATURES:



BRIGHTEST IN
CLASS



LONGER
LIFE




ECO
FRIENDLY



INSTANT
START



HPF
DRIVER BASED

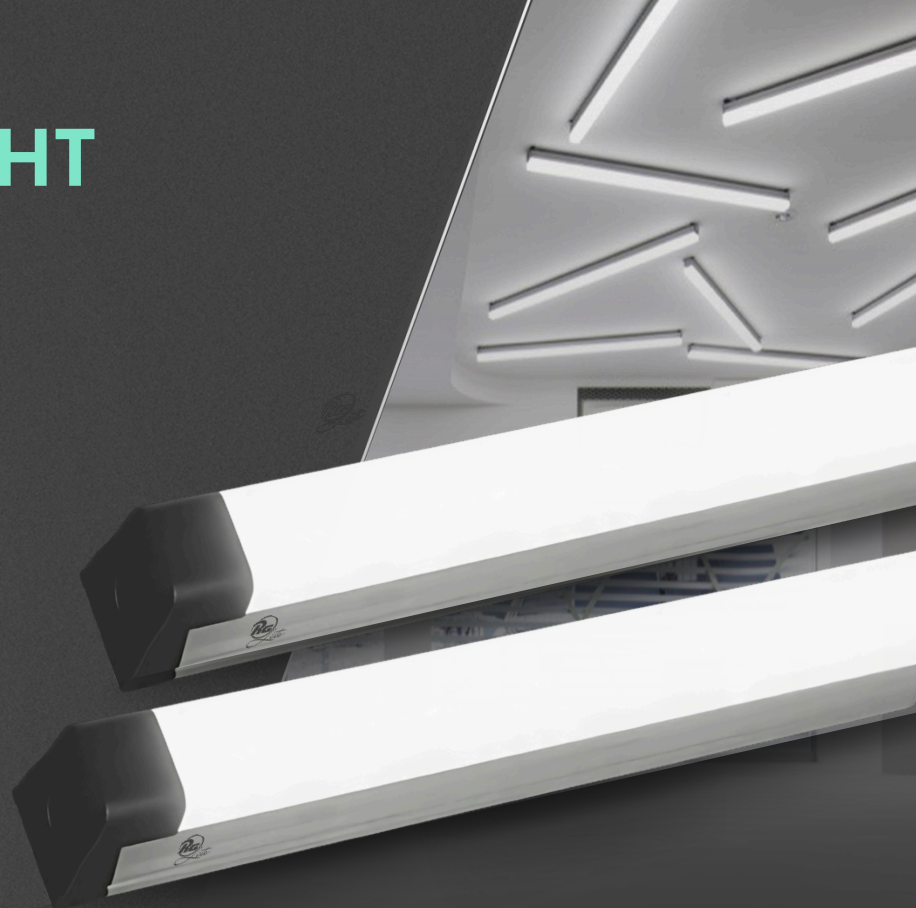

FLOODLIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	50W	100W	200W
MODEL NAME	RG FLOOD 50	RG FLOOD 100	RG FLOOD 200
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	(LM)±5% —	(LM)±5% —	(LM)±5% —
WIDE-VOLTAGE RANGE	140 - 380V	140 - 380V	140 - 380V
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

50W : Red, Blue, Pink, Green, White, Warm White, Neutral White

100W : Red, Blue, Pink, Green, White, Warm White, Neutral White

200W : Red, Blue, Pink, Green, White, Warm White, Neutral White

APPLICATIONS:



STREET
LIGHTING



GARDEN
LIGHTING



CAMPUS
LIGHTING



PARKING
LIGHTING



DRIVER
BASED



CHANDRAYAAN STAR FLOODLIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	50W	100W	200W
MODEL NAME	RG STAR 50	RG STAR 100	RG STAR 200
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	(LM)±5% —	(LM)±5% —	(LM)±5% —
WIDE-VOLTAGE RANGE	140 - 380V	140 - 380V	140 - 380V
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

50W : Red, Blue, Pink, Green, White, Warm White, Neutral White

100W : Red, Blue, Pink, Green, White, Warm White, Neutral White

200W : Red, Blue, Pink, Green, White, Warm White, Neutral White

APPLICATIONS:



STREET
LIGHTING



GARDEN
LIGHTING




CAMPUS
LIGHTING



PARKING
LIGHTING



COB
BASED

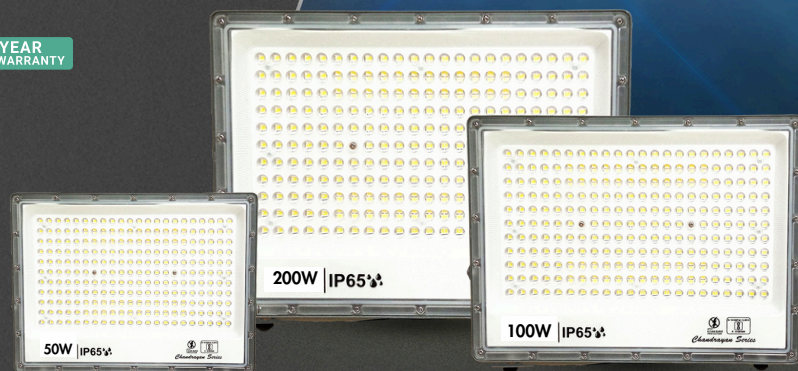

STREET LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	30W	50W	100W
MODEL NAME	RG AYPL 30W	RG AYPL 50W	RG AYPL 100W
POWER FACTOR	0.9, TA-50°C	0.9, TA-50°C	0.9, TA-50°C
LUMEN	(LM)±5% 3900	(LM)±5% 6500	(LM)±5% 13000
TEMPERATURE	6500K	6500K	6500K
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac



COLORS AVAILABLE:

30W : White

50W : White

100W : White

FEATURES:



UPTO 80%
ENERGY SAVING



NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START



ROPE LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	ROPE LIGHT
MODEL NAME	RG ROPE
NO. OF LED'S	2835 SMD LED 120 LED/MTR
IP RATE	IP 65
WATT	1M - (14-15W)
INPUT-VOLTAGE RANGE	220-230 Vac



COLORS AVAILABLE:

ROPE LIGHT: Red, Blue, Pink, Green, White, Warm White, Neutral White
Tri Colour, Amber, Ocean Blue

FEATURES:



UPTO 80%
ENERGY SAVING




NO FLICKER
NO GLARE



ECO
FRIENDLY



INSTANT
START

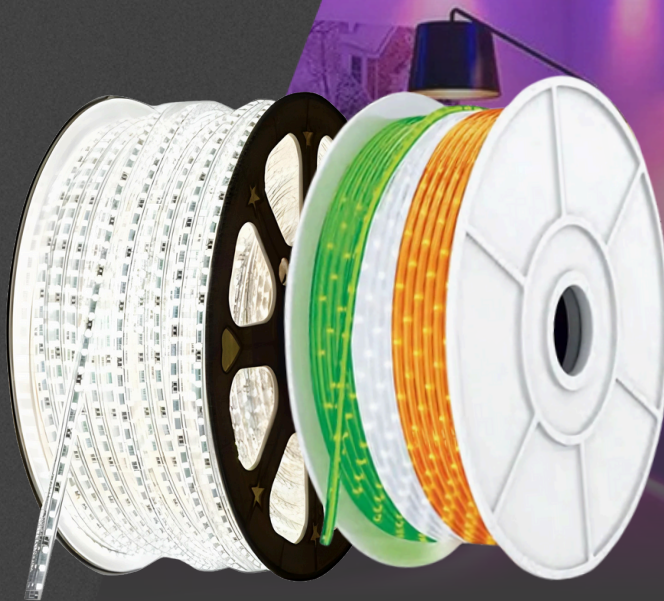

STRIP LIGHT

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	120 LED	240 LED
MODEL NAME	RG STRIP 120	RG STRIP 240
LENGTH	5 MTR	5 MTR
SMD	2835	2835
LUMENS PER LED	26	26
INPUT-VOLTAGE RANGE	12 V (DC)	12 V (DC)



COLORS AVAILABLE:

120 LED STRIP: Red, Blue, Pink, Green, White, Warm White, Neutral White, Amber, Ocean Blue, RGB, 3 IN 1,

240 LED STRIP: Red, Blue, Pink, Green, White, Warm White, Neutral White, Amber, Ocean Blue, RGB, 3 IN 1,

FEATURES:



UPTO 80%
ENERGY SAVING




BRIGHTEST
IN CLASS



ECO
FRIENDLY



INSTANT
START

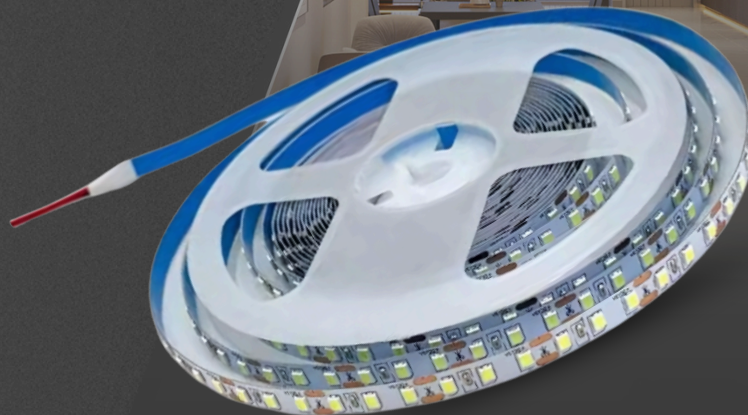

STRIP DRIVER

LONGER LIFE | BETTER LIGHT COVERAGE | ROBUST DESIGN

SPECIFICATIONS	2A	5A	10A	20A
MODEL NAME	AYPL-STAR 2A	AYPL-STAR 5A	AYPL-STAR 10A	AYPL-STAR 20A
POWER FACTOR	12V-2A, >0.90	12V-2A, >0.90	12V-2A, >0.90	12V-2A, >0.90
FREQUENCY	50HZ	50HZ	50HZ	50HZ
SURGE PROTECTION	4KV	4KV	4KV	4KV
INPUT-VOLTAGE RANGE	220-230 Vac	220-230 Vac	220-230 Vac	220-230 Vac



- OVER - VOLTAGE PROTECTION
- HIGH ENERGY EFFICIENCY
- SLIMMER FORM FACTOR TO FIT IN ALL SPACES
- PEACE OF MIND WITH TROUBLE FREE & SAFE OPERATION





RG LITE INDIA PVT. LTD.

- 📍 E - 143, Phase 1, Opp. Pani ki Tanki, Transport Nagar, Lucknow - 226012
- 📍 Pocket O, Plot No. 47, Sector 3, Bawana Ind Area, Delhi - 110039
- 📍 76/1, 76/2, Near DAV Public School Hapur-245101

Follow us on:



www.rglite.in

(Scan & Visit)

Explore our other product ranges
in various segments.



rglitehelp@gmail.com



1800 572 4950